

BC • 604-523-6608 AB • 403-717-9644 Toll Free • 1-877-786-7655 WWW.STORMTEC.CA

ETP5 - ELECTRIC TRANSFER PUMP

For pumping large volumes of water in sewer bypass, water transfer, bulk dewatering, or well-point dewatering applications.

Stormtec offers a variety of electric transfer pump applications to move large volumes of sewage, liquids, and sludge up to 3 inches in diameter. Our electric transfer pumps are typically mounted on a skid, which can stand-alone or be used in combination with additional equipment.

FEATURES

- Skids are constructed out of carbon steel epoxy coated with integral lifting lugs for easy transport.
- Fitted 230-volt control panel.
- Automatic float controls.
- Systems can stand alone or be used in combination with additional equipment.

MATERIAL SPECIFICATIONS

MODEL	ETP5	
MAX FLOW	250 GPM (15.8 L/s)	
CONNECTIONS	3" x 3"	
МАХ НЕАД	85 FT (26m)	
POWER	230V/19.5A	
APPLICATION	Water Transfer, Bulk Dewatering	



SURFACE PUMPS SELF-PRIMING



E MENU

CLOSE-COUPLED - FBSEF

FEATURES

- Volute: Rugged cast iron construction with a large chamber for rapid self priming
- Impeller: Semi-open cast iron ideal for handling fertilizer, salt water, dirty water, or other liquids; blind-hole tapped so liquid will not corrode the shaft
- Mechanical Seal: Carbon/ceramic faces; FKM elastomers; 300-series stainless steel components
- Motor: Reliable, industry-standard; totally-enclosed; fan-cooled TEFC enclosure



- Capacities to 295 gpm
- Heads to 92 feet
- 75 psi maximum working pressure
- 212 °F maximum temperature
- Clockwise rotation when viewed from motor end
- NPT pipe connections




APPLICATIONS

- Irrigation
- Construction
- Mining
- Commercial
- Municipal
- Light Industrial
- Residential

SURFACE PUMPS SELF-PRIMING



CLOSE-COUPLED - FBSEF

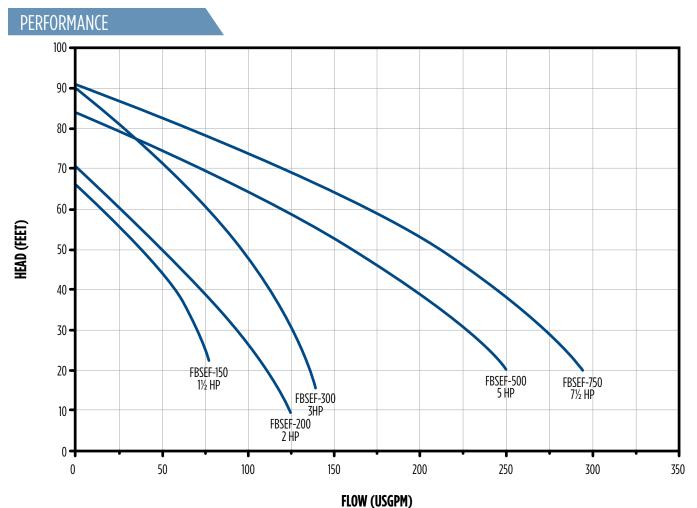

MENU

ORDERING INFORMA	TION					
Model	HP	PH	Volts	Suction/Discharge	Order No.	Wt.
FBSEF-150-SC	1½	1	115/230	1-1/4" x 1-1/4"	92932015	52
FBSEF-200-SC	2	1	230	2" x 2"	92932020	60
FBSEF-300-SC	3	1	230	2" x 2"	92932030	71
FBSEF-500-SC	5	1	230	3" x 3"	92932050	165
FBSEF-300-TC	3	3	208-230/460	2" x 2"	92934030	77
FBSEF-500-TC	5	3	208-230/460	3" x 3"	92934050	148
FBSEF-750-TC	7½	3	208-230/460	3" x 3"	92934075	148
FBSEF-500K	5	PE	-	3" x 3"	92920050	50
FBSEF-750K	7½	PE	-	3" x 3"	92920075	60

NOTE: All dimensions in inches. All weight in pounds. Pump end kits (less power).